

HST-3000 Ethernet SIM

Test Electrical and Optical Ethernet up to 1G



Key Features

- Electrical and optical Ethernet testing in one module
- Traffic generation at full line rate or variable loads to test services at layer 2 and 3
- ‘Thru Mode’ to measure live traffic
- Cable diagnostics to identify and locate electrical faults
- Scripted RFC 2544 benchmark testing
- Loopback L2 or L3 traffic from any instrument in JDSU’s Ethernet portfolio

As networks migrate from circuit-switched to packet-switched architectures, Ethernet services are being pushed out of the network core and toward the edge. Therefore, service providers must equip their technicians to adequately turn up and troubleshoot this new technology while continuing to support their legacy T/E carrier services.

While the majority of today’s Ethernet links carry only data traffic, Voice over IP (VoIP) and IP Video are becoming more common. These triple-play networks, which transmit voice, video, and data traffic, present a unique set of challenges. Service providers for these network environments are now responsible for delivering a layer 7 service, rather than a traditional layer 2 or layer 3 pipe.

The HST-3000, equipped with the Ethernet Service Interface Module (SIM), addresses this requirement for 7-layer testing in a rugged, modular platform that is ideal for field use. It has a full Ethernet feature set for testing both electrical and optical links with data rates up to 1 Gb/s. The HST-3000 also offers multiple stream support for the verification of prioritization schemes and advanced monitoring options for advanced troubleshooting capabilities. In addition, the HST-3000’s VoIP and IP Video options allow technicians to emulate the end customer’s user experience and objectively measure quality of service.

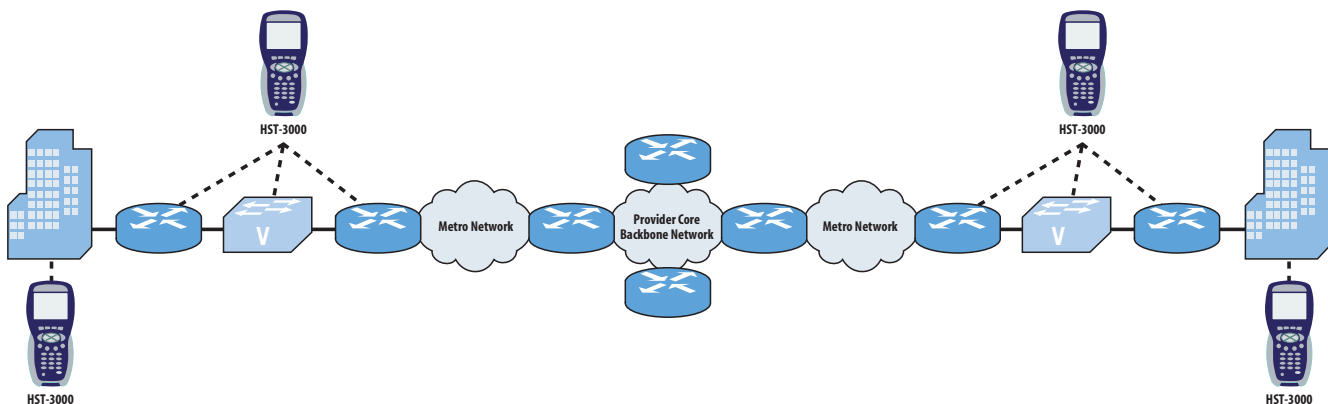


Figure 1. Testing IP traffic on a Metro network

Product Features

Layer 2 Packet Testing

The HST-3000 Ethernet SIM provides technicians with layer 2 packet testing capabilities, allowing for the generation of Ethernet frames with various configurable parameters, such as bandwidth utilization, frame length, and frame payload. These frames can be generated with constant, ramp, or bursty traffic load settings to fully test the Ethernet service.

Layer 3 IP Testing

The HST-3000 Ethernet SIM enables technicians to generate and receive IP packets with its built-in layer 3 testing capabilities. These packets have a valid IP header, containing user-defined fields, such as TTL, TOS/DSCP, source IP address, and destination IP address. Since dynamic addressing is supported, the source IP address can be assigned by a DHCP server, if necessary. Basic domain name service (DNS) testing can be performed to ensure that the DNS server is able to resolve the name to the appropriate address. In addition, traffic load settings can be configured for constant, ramp, and bursty traffic in order to simulate different network traffic conditions and analyze the performance of the link.

One-Button RFC 2544 Automation

To verify that service level agreements (SLAs) are met, service providers must run a full suite of tests at turn-up. This set of standard tests, known as RFC 2544, is wrapped into an easy-to-use auto test on the HST-3000. With one press of a button, the link is configured with the technician's saved settings and tested against customizable thresholds. This ensures that the test is performed the same way every time, providing consistent, repeatable results.

Cable Diagnostics

On electrical Ethernet circuits, the HST-3000 can display the link speed, link status, cable status, MDI/MDIX, and distance to fault with one press of a button. To verify connectivity on fiber lines, the HST-3000 reports the power level of the optical signal. These features allow technicians to quickly sectionalize physical layer problems.

Bi-Directional Monitoring/Thru Mode

The dual ports (both optical and electrical) on the HST-3000 Ethernet SIM enable technicians to gain access to circuits under test in order to perform in-service monitoring in both directions. Not only does this simplify sectionalization of the network, it also allows for the analysis of live customer traffic without the use of a splitter.

VLAN Protocol Support

VLAN tag manipulation allows for the generation of an Ethernet traffic stream with a specific VLAN ID (as per specification 802.1Q) and VLAN user priority (as per specification 801.P). This enables technicians to verify the correct transmission and prioritization of the stream through the network. In addition, VLAN filtering allows technicians to isolate a specific VLAN stream and compare its performance with the total performance of the link. VLAN protocol support is available for both layer 2 and layer 3 traffic frames.

Multiple Streams Option

Many service providers are beginning to deploy different classes of service in order to offer tiered options to customers or to prioritize traffic to effectively manage triple-play networks. This leads to a new type of problem where the latency and loss may be acceptable for regular traffic, but the higher priority traffic does not meet its required SLA.

In order to test these new networks, technicians can use the Multiple Streams option for the HST-3000 to oversubscribe the switch and determine if the various SLAs are met. This is accomplished by using two or three different traffic streams of differing priorities and sending more traffic through the switch than it can handle. For example, a technician can attempt to send 1000 Mb/s of traffic through an OC-3 SONET ring. The switch should drop the lower priority traffic, but it should allow all of the higher priority traffic to pass through to the far end where another HST-3000 is connected to the receiver.

VoIP Option

The HST-3000 with the VoIP option can validate VoIP service connectivity, feature availability, and voice quality. In addition, it provides a comprehensive set of features, including signaling, IP ping, packet statistic, and traceroute analysis in order to identify, diagnose, and sectionalize VoIP network and equipment problems.

IP Video Option

The HST-3000 IP Video option is a video test suite specifically designed to meet the needs of the field technician who is responsible for the provisioning or turn-up of IP Video services that carry video program content over an Access network. Test access includes the 2-wire ADSL interface or the Ethernet 10/100 interface at the DSL modem or FTTx residential gateway. The test suite includes set top box (STB) emulation with signaling support for broadcast video (IGMP) and VOD (RTSP). Video transport stream analysis is provided as well as video quality of service measurements, including packet jitter, packet loss, IGMP latency, and program clock reference (PCR) jitter analysis.

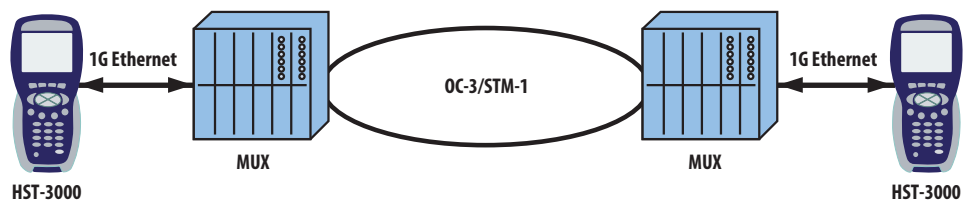


Figure 2. Class-of-service testing using the HST-3000 Ethernet SIM with the Multiple Streams option

Specifications

Test Interfaces

Optical Ethernet/IP

100/1000 Mb/s Dual SFP ports

Electrical Ethernet/IP

10/100/1000 Mb/s Dual RJ-45 ports

Test modes Terminate

Monitor

Thru (bi-directional monitor)

Ethernet (Layer 2) Specifications

Duplex modes Full, half

Flow control Supported

Traffic generation Constant, ramp, bursty

Payload Acterna, 223-1, Inv 223-1, 231 -1, Inv 232-1, all

1s, all 0s, user-defined

Frame length 64-1522 bytes, user-defined, undersized,

jumbo, random

MAC addressing Configurable source and

destination MAC addresses

Frame format 802.3 or DIX

VLAN settings ID, priority

Bit error testing patterns PRBS (223-1, 231-1, and inverted

selections), all 1s, all 0s, user-defined

Framed pattern test per NCITS TR-25:1999 CRPAT, CJPAT,

CSPAT

Traffic filtering MAC source address

MAC destination address

Frame type/length

VLAN ID, VLAN priority

IP (Layer 3) Specifications

Traffic generation Constant, ramp, bursty

IP addressing Configurable source and destination IP

addresses, TOS/DSCP

Traffic filtering Source IP address

Destination IP address

Subnet mask

TOS/DSCP fields

Multiple Streams Option

Number of streams 8

Stream modes Layer 2

Layer 3

VLAN settings ID, priority

Cable Testing

Optical Power measurement

CAT-5 cable Link speed, link status, cable status, crossover/

straight, distance to fault, pin mapping, pair length,

polarity, skew

Power over Ethernet Indicates if the power supply

responds to Class 1 power requests

Key Results

Link status

- Optical power measurement

- Link active

- Frame detected

- Sync obtained

Configuration status

- Auto-negotiation link configuration ACK

- Auto-negotiation link advertisement status

- DHCP lease time

- Destination MAC address when using ARP

Link stats

- Bandwidth utilization

- Frame rate

- Rx/Tx L1, L2, L3 Mb/s

- Round trip delay

- Service disruption time

Link counts

- Total received and transmitted frames, pause frames,

VLAN frames, unicast frames, multicast frames, broadcast

frames, frame length (bins) Errored counts

- FCS errored frames, runts, jabbers, undersized frames, OOS

frames, lost frames, IP checksum errors, Acterna payloa

errors

Conformance with RFC 2544

- Throughput test

- Latency test

- Frame loss test

- Back-to-back frame test

Physical Specifications

Size (H x W x D) 9.5 x 4.5 x 2.75 in

Weight 2.7 lb (with battery)

Operating temperature 22°F to 122°F

Storage temperature -40°F to 150°F

Battery life 10 hrs typical usage

Charging time 7 hrs from full discharge to full charge

Operating humidity 10% to 80% relative humidity

Storage humidity 10% to 95% relative humidity

Display 1/4 VGA monochrome transreflective, 3.8-in

diagonal (readable in direct sunlight)

General

Ruggedness Survives 3-ft drop to concrete on all sides

Water-resistance Splashproof (may be used in

heavy rain)

Language English, German, Spanish, French

Keypad Typical 12-button keyboard

Ordering Information

Base Units

HST-3000 base unit with copper testing, requires the purchase

of a SIM, CE marked HST3000C-CE

HST-3000 base unit without copper testing, requires the

purchase of a SIM, CE marked HST3000-CE

SIMs (Service Interface Module)

10/100/1000 Ethernet HST3000-ETH

Dual tip/ring/ground copper test interface, requires the

HST3000C base unit HST3000-CuCE

Software Options

Optical Ethernet HST3000-OPTETH

Multiple Streams HST3000-MSTR

IP Video Analysis HST3000S-IP-Video

VoIP Analysis HST3000S-VoIP

VoIP Mean Opinion Score HST3000S-MOS

H.323 VoIP Signaling HST3000S-H.323

SCCP VoIP Signaling HST3000S-SCCP

SIP VoIP Signaling HST3000S-SIP

SCCP MGCP VoIP Signaling HST3000S-MGCP

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2006 JDS Uniphase Corporation. All rights reserved. 30137549 000 0506 HSTETHERSIM.DS.ACC.TM.AE

Test & Measurement Regional Sales

| | | | | |
|---|--|---|---|------------------------------|
| NORTH AMERICA TEL: 1 866 228 3762 FAX: +1 301 353 9216 | LATIN AMERICA TEL: +55 11 5503 3800 FAX: +55 11 5505 1598 | ASIA PACIFIC TEL: +852 2892 0990 FAX: +852 2892 0770 | EMEA TEL: +49 7121 86 2222 FAX: +49 7121 86 1222 | WEBSITE: www.jdsu.com |
|---|--|---|---|------------------------------|